

# zBoost Metro - Extend Cell Phone Signal Indoors for Condos, Lofts and Apartments




Designed for consumers in single story urban dwellings, the zBoost METRO boosts indoor signal up to 1500 sq ft for multiple users in their home or office. The zBoost METRO supports all U.S. phones and mobile devices using 800 and 1900 MHz and doesn't require an outside antenna placement.

The package includes everything you need: zBoost amplifier base unit, base unit antenna, power supply, coaxial cable (RG59-mini), signal antenna and mounting hardware. The wide radio wave beam width directional antenna receives signals from multiple cell towers.

## Benefits include:

- Perfect for single story settings – no vertical separation needed
- Increases indoor signal coverage – up to 1500 sq ft
- Supports multiple users simultaneously
- Compatible with all U.S. carriers and mobile devices using 800 & 1900 MHz (except Nextel/iDEN or 4G, 2100MHz phones)
- Increases voice and data transmission
- Decreases dropped or missed calls
- Easy to set up – comes with everything you need
- No cradle or connections to your phone
- Extends phone battery life (uses less power when signal is stronger)
- Protects the carrier network using patented technology

**Easy to set up – comes complete with everything needed**

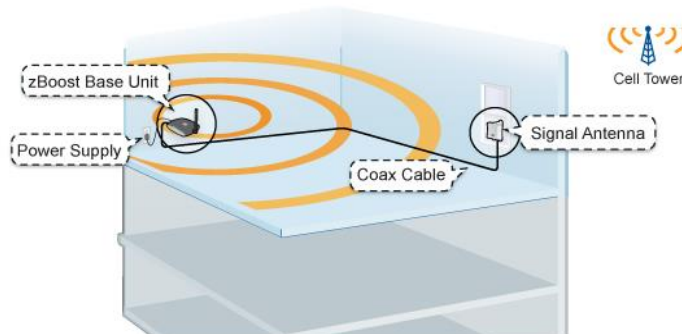

## Product Specifications for zBoost METRO – YX540–Dual Band

PCS band	
Frequency	Uplink:1850 to 1910 MHz Downlink: 1930 to 1990 MHz
System Gain	54dB
PCS band supported	A, D, B, E, F, C
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
Cellular band	
Frequency	Uplink: 824 to 849 MHz Downlink: 869 to 894 MHz
System Gain	52dB
Cellular band supported	A, B, A', B'
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
General	
Power Consumption – Power Supply Current	3W standby; 7W max signal - 2.0A Max
Wall Supply Input ; Voltage	100-240VAC 50-60 Hz ; 5.0VDC
System Certifications	FCC Parts 15 & 24 (PCS) and Parts 15 & 22 (CEL), Industry Canada
Base Unit Size and Weight	5" x 7" x 1.25" – 9 oz.
Operating Conditions	Indoor Use Only (40°- 105° F)
Coverage (open areas)	Over 1500 sq ft in ideal conditions

Product coverage is limited by setup and antenna isolation. Handles all PCS or CEL protocols and includes multiple patented technologies to provide low-cost coverage while continually adapting to signals to prevent interference and remain transparent to the wireless network. Provides an indicator if the antennae are positioned improperly, but will NOT suffer damage or interfere with the Carrier Network.