

# zBoost® SOHO YX560SL Cellular Signal Booster for the Home, Office & Cabin




Wi-Fi, the leader in consumer cellular booster kits, now offers the YX560SL to provide increased in-building voice and data coverage for superior reach into rural environments. The YX560SL supports multiple users and all devices operating on (CEL) 800MHz and (PCS) 1900MHz.

The YX560SL, backed by a 2 year Manufacturer's Warranty, ships complete and includes: zBoost Amplifier Base Unit with Wall Mounting Bracket, Base Unit Distribution Whip Antenna, AC power supply, 50ft of Coaxial RG6 Cable and high-gain Directional Signal Antenna with Mounting Hardware.

## Additional Benefits include:

- Supports multiple voice & data users simultaneously
- Compatible with all mobile phones and 3G data cards and devices operating on (CEL) 800MHz and (PCS) 1900MHz
  - iPhone, Samsung, Blackberry, Android, etc.
- Designed for optimum data performance
- Increased system gain (70dB) for improved in-building coverage and superior reach into rural environments
- Amplifier gain automatically adjusts for peak performance
- Extends phone battery life (uses less power when signal is stronger)
- Designed in America with patented technology to prevent interference with the wireless networks

**Easy to Set Up – Comes Kit-Complete  
Coverage up to 6500 square feet**

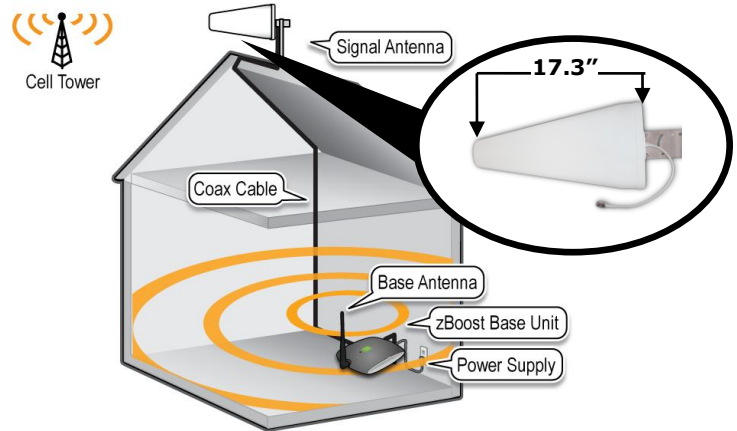

| Product Specifications for zBoost YX560SL    |  |
|--|--|
| <b>PCS band</b>                              |  |
| Frequency                                    | Uplink:1850 to 1910 MHz Downlink: 1930 to 1990 MHz               |
| System Gain                                  | 70db   |
| Max Rx / Distribution Power                  | 13dBm  |
| Networks                                     | CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G               |
| <b>Cellular band</b>                         |  |
| Frequency                                    | Uplink: 824 to 849 MHz Downlink: 869 to 894 MHz                  |
| System Gain                                  | 70dB   |
| Max Rx / Distribution Power                  | 13dBm  |
| Networks                                     | CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G               |
| <b>General</b>                               |  |
| Power Consumption – Power Supply Current     | 3W standby; 7W max signal - 2.0A Max                             |
| Wall Supply Input; Voltage                   | 100-240VAC 50-60 Hz ; 5.0VDC                                     |
| System Certifications                        | FCC Parts 15 & 24 (PCS) and Parts 15 & 22 (CEL), Industry Canada |
| Base Unit Size and Weight                    | 5" x 7" x 1.25" – 9 oz.  |
| Coverage (depends on outside signal quality) | Up to 6500 sq ft   |

Product coverage is limited by setup and antenna isolation. Handles all CEL protocols (not 4G, LTE, or iDEN) and includes multiple patent pending technologies to provide affordable coverage while continually adapting to signals to prevent interference and remain transparent to the wireless network. Provides an indicator if the antennae are positioned improperly, but will NOT suffer damage or interfere with the Carrier Network.