



## zBoost Cellular REACH™ ZB560Y

### Cell Phone Signal Booster




zBoost, a leader in consumer cell phone signal boosters, now offers the improved zBoost Cellular REACH as the solution to your missed and dropped calls inside your building. The zBoost REACH boosts cell phone signals for voice calls and text for carriers operating on CEL 800 MHz frequency.

The zBoost Cellular REACH captures the marginal to reliable cellular signal you have outdoors and rebroadcasts it indoors, **up to 7,500 square feet**, so you can enjoy clearer, faster service without interruption.

The ZB560Y is backed by a 2 year Manufacturer's Warranty Replacement and ships complete: amplifier base unit, indoor antenna, power supply, 50 ft. of RG6 cable, external directional antenna, and mounting hardware.

#### Benefits include:

- High performing signal booster - coverage **up to 7,500 sq. ft.** (up to 71 dB system gain)
- Ideal for use in remote or rural residential areas where CEL (800 MHz) is the primary frequency in use
- Reduces dropped and missed calls and can provide faster 3G data performance for multiple simultaneous users
- Boosts performance on iPhone™, Samsung™, Android and other phones and mobile devices
- Automatically operates at maximum gain – no manual adjustments needed
- Extends phone battery life - phone uses less power when the indoor signal is stronger
- Easy to set up - all hardware included
- Designed in Silicon Valley – Made in North America

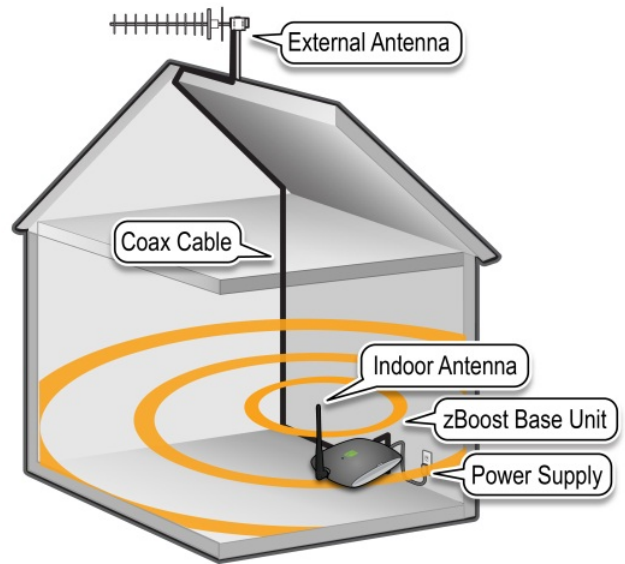

Product Specifications – ZB560Y	
<b>Cellular band</b>	
Frequency	824 to 894 MHz
System Gain	71 dB
Cellular band supported	A, B, A', B'
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
<b>General</b>	
Power Consumption – Power Supply Current	3W standby; 7W max signal - 2.0A Max
Wall Supply Input; Voltage	100-240VAC 50-60 Hz; 5.0VDC
System Certifications	FCC Parts 15 & 20, Industry Canada (IC)
Base Unit Size and Weight	5" x 7" x 1.25" – 9 oz.
Coverage (depends on outside signal quality)	Up to 7,500 sq. ft.