

# NEW zBoost® YX560P Cellular Signal Booster for the Home, Office & Cabin




zBoost, the leader in consumer cellular booster kits, now offers the YX560P to provide increased in-building voice and data coverage and better reach into rural environments. The YX560P supports multiple users and all devices operating on (CEL) 800MHz & (PCS) 1900MHz Networks.

The YX560P, backed by a 2 year Manufacturer's Warranty Replacement, ships complete and includes: zBoost Amplifier Base Unit with Wall Mounting Plate, Base Distribution Whip Antenna, AC power supply, 50ft of Coaxial RG6 Cable and Directional Signal Antenna with Mounting Hardware.

**Easy to Set Up – Comes Kit-Complete  
Coverage up to 3500 square feet**

## Additional YX560P Benefits include:

- Supports multiple voice & data users simultaneously
- Compatible with all mobile phones and 3G data cards and devices operating on (CEL) 800MHz & (PCS) 1900MHz networks
  - iPhone, Samsung, Blackberry, Android, etc.
- Designed for optimum data performance
- Increased system gain (65db) for improved in-building coverage and better reach into rural environments
- Amplifier gain automatically adjusts for peak performance
- Extends phone battery life (uses less power when signal is stronger)
- Designed in America with patented technology to prevent interference with the wireless networks

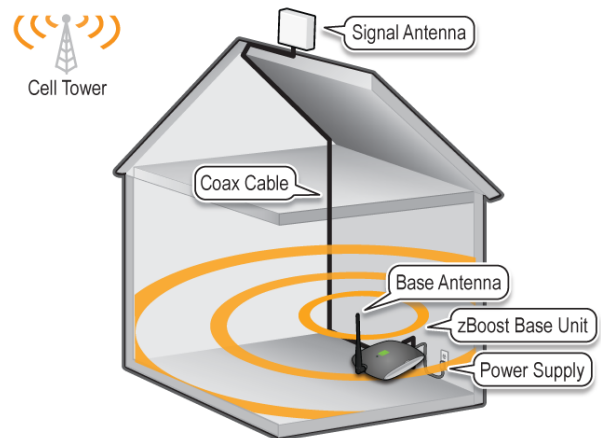

## Product Specifications for zBoost YX560P

PCS band	
Frequency	Uplink:1850 to 1910 MHz Downlink: 1930 to 1990 MHz
System Gain	65dB
Max Rx / Distribution Power	13dBm
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
Cellular band	
Frequency	Uplink: 824 to 849 MHz Downlink: 869 to 894 MHz
System Gain	65dB
Max Rx / Distribution Power	13dBm
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
General	
Power Consumption – Power Supply Current	3W standby; 7W max signal - 2.0A Max
Wall Supply Input; Voltage	100-240VAC 50-60 Hz ; 5.0VDC
System Certifications	FCC Parts 15 & 24 (PCS) and Parts 15 & 22 (CEL), Industry Canada
Base Unit Size and Weight	5" x 7" x 1.25" – 9 oz.
Coverage (depends on outside signal quality)	Up to 3500 sq ft

Product coverage is limited by setup and antenna isolation. Handles all PCS or CEL protocols (no 4G, IDEN, or AWS) and includes multiple patented technologies to provide affordable coverage while continually adapting to signals to prevent interference and remain transparent to the wireless network. Provides an indicator if the antennae are positioned improperly, but will NOT suffer damage or interfere with the Carrier Network.