

# zBOOST-ONE YX400-P FOR SPRINT AND METRO-PCS

## Set-up Guide

The zBoost-ONE™ cell phone signal booster extends a Cell Zone™ for 1 - 4 phones/devices on the same PCS carrier (either Sprint or MetroPCS) in homes or offices. zBoost-ONE will boost signal up to 1200 sq ft or up to 40 ft from the zBoost unit.



There are **two steps** for setup:

### FIRST: Sync zBoost-ONE to your carrier network (either Sprint or MetroPCS)

- *NOTE: This step only needs to be performed once at the beginning of your set-up*


  1. Place the zBoost-ONE unit on a window sill or location of strongest signal.
  2. Connect the zBoost unit to the provided power supply and plug into a power outlet.
  3. The SyncLink Button will flash red.
  4. Make a call with your device. If using a wireless data card, make a connection using the software on your computer.
  5. Press the SyncLink Button.
  6. The SyncLink Button will blink green and the Handset Indicator will turn on.

**NOTE:** If this does not happen, then the sync has failed. Disconnect the power from the wall outlet and repeat steps.

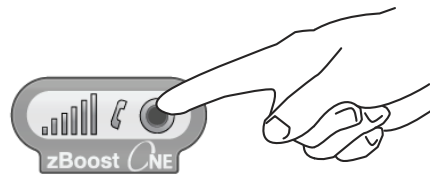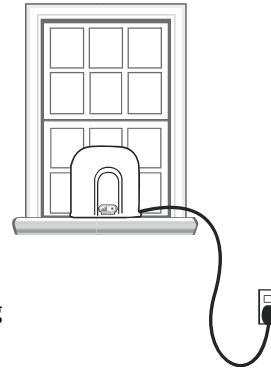

### SECOND: Find the best position for the zBoost-ONE

1. The Signal Strength Indicator reflects the signal level being received by the unit at the window. Adjust the angle or position of the zBoost-ONE unit until the strongest possible signal is received – the most bars.
2. 3 or more lit bars will provide optimal performance (up to 40 ft from the zBoost unit).

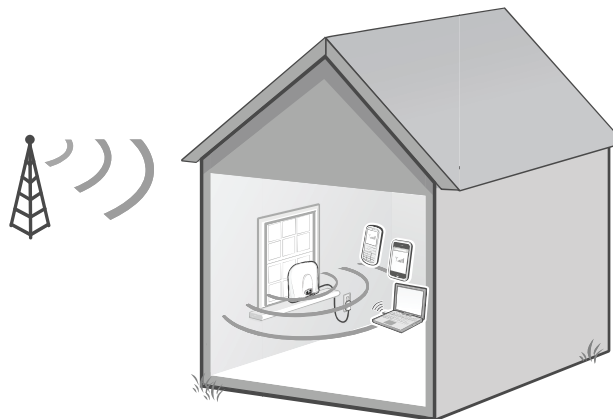


### QUESTIONS?

Visit [www.Wi-Ex.com](http://www.Wi-Ex.com)

Email [CustomerSupport@Wi-Ex.com](mailto:CustomerSupport@Wi-Ex.com)

Or call 1-800-871-1612

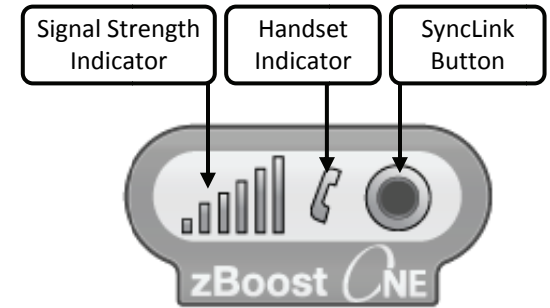

### SPECIFICATIONS: zBoost ONE YX400-P

Frequency	Uplink 1850-1910MHz	Downlink 1930-1990MHz
Networks	CDMA, 1xrtt, EVDO	
Power Supply	90-264 VAC, 50-60Hz	
Base Unit Weight	1.2 lbs	
Base Unit Size	10" x 9" x 3.5" (w x h x d)	
Coverage (open area)	Up to 1200 sq ft or 40 ft from the unit	
System Gain	Average 45 dB	

Protects the operator's network using patent-pending technologies

### FCC ID S04YX400-PCS IC: 5544A-YX400PCS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

zBoost products are manufactured & distributed by Wi-Ex. © 2009. All rights reserved.

Sprint and MetroPCS are registered trademarks of their respective owners.

Manufacturer warranty for the YX400-P is 1 year.

Register your product at [www.Wi-Ex.com](http://www.Wi-Ex.com)