



## zBoost® PRO 7500 ZBC745SL-CM

### Cell Phone Signal Booster for Professional Installers

zBoost, a leader in consumer cell phone signal boosters, offers the improved zBoost PRO 7500 as the solution to your missed and dropped calls indoors. The zBoost PRO 7500 boosts voice and text for all major carriers.


The zBoost PRO 7500 captures the marginal to reliable cellular signal you have outdoors and rebroadcasts it indoors, **up to 7,500 square feet**, so you can enjoy clearer, faster and more reliable service without interruption.

The ZBC745SL-CM is backed by a 2 year Manufacturer's Warranty Replacement and ships complete: amplifier base unit, indoor dome antenna, power supply, 50 ft. and 15 ft. of RG6 coaxial cable, high-gain external antenna, and mounting hardware.



#### Benefits include:

- High performance dual band signal booster - coverage **up to 7,500 sq. ft.** (up to 77 dB system gain)
- Ideal for buildings with marginal to reliable outside signal
- Reduces dropped and missed calls and can provide faster 3G data performance for multiple simultaneous users
- Boosts performance on iPhone™, Samsung™, Android™ and other phones, mobile devices and wireless alarm panels
- Automatically operates at maximum gain - no manual adjustments needed
- Extends phone battery life - uses less power when signal is stronger
- Designed in Silicon Valley - Made in North America

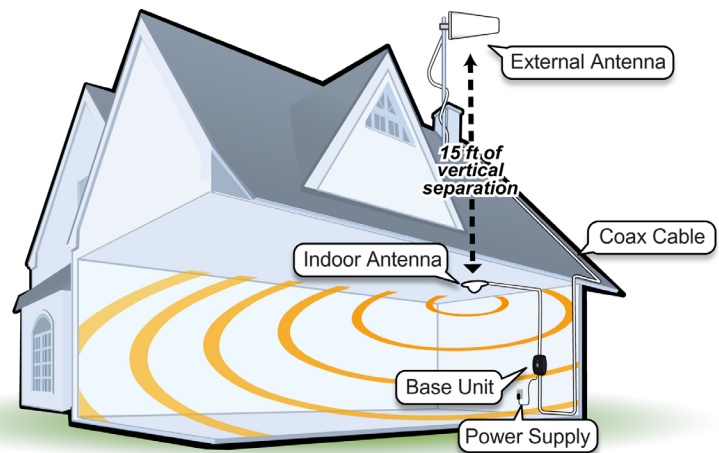

Product Specifications – ZBC745SL-CM	
<b>PCS</b>	
Frequency	1850 to 1990 MHz
System Gain	77 dB
PCS band supported	A, D, B, E, F, C
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
<b>Cellular</b>	
Frequency	824 to 894 MHz
System Gain	70 dB
Cellular band supported	A, B, A', B'
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
<b>General</b>	
Power Consumption – Power Supply Current	3W standby; 7W max signal - 2.0A Max
Wall Supply Input; Voltage	100-240VAC 50-60 Hz; 5.0VDC
System Certifications	FCC Parts 15 & 20, Industry Canada
Base Unit Size and Weight	5" x 7" x 1.25" – 9 oz.
Operating Conditions	Indoor Use Only (40°- 105° F)
Coverage (open areas)	Up to 7,500 sq. ft.