



zBoost® PRO ZBC3500

Cell Phone Signal Booster for Professional Installers

zBoost, a leader in consumer cell phone signal boosters, offers the improved zBoost PRO as the solution to your missed and dropped calls inside your building. The innovative zBoost PRO boosts cell phone signals for voice calls and text for all major carriers.


The zBoost PRO captures the reliable cellular signal you have outdoors and rebroadcasts it indoors, **up to 3,500 square feet**, so you can enjoy clearer, faster and more reliable service without interruption.

The ZBC3500 is backed by a 2 year Manufacturer's Warranty Replacement and ships complete: amplifier base unit, indoor antenna, power supply, 50 ft. of RG6 cable, external antenna, and mounting hardware.



Benefits include:

- High performance dual band signal booster - coverage **up to 3,500 sq. ft.** (up to 69 dB system gain)
- Ideal for buildings with reliable outside signal
- Reduces dropped and missed calls and can provide faster 3G data performance for multiple simultaneous users
- Boosts performance on iPhone™, Samsung™, Android™ and other phones, mobile devices and wireless alarm panels
- Automatically operates at maximum gain – no manual adjustments needed
- Extends phone battery life – uses less power when signal is stronger
- Designed in Silicon Valley – Made in North America

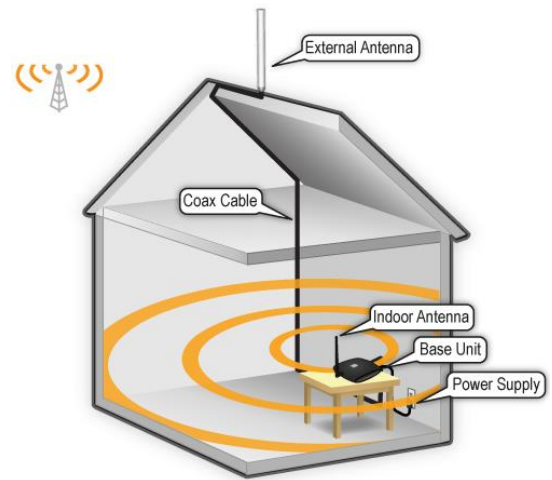

Product Specifications – ZBC3500	
PCS	
Frequency	1850 to 1990 MHz
System Gain	69 dB
PCS band supported	A, D, B, E, F, C
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
Cellular	
Frequency	824 to 894 MHz
System Gain	63 dB
Cellular band supported	A, B, A', B'
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
General	
Power Consumption – Power Supply Current	3W standby; 7W max signal - 2.0A Max
Wall Supply Input; Voltage	100-240VAC 50-60 Hz; 5.0VDC
System Certifications	FCC Parts 15 & 20, Industry Canada
Base Unit Size and Weight	5" x 7" x 1.25" – 9 oz.
Operating Conditions	Indoor Use Only (40°- 105° F)
Coverage (open areas)	Up to 3,500 sq. ft.